



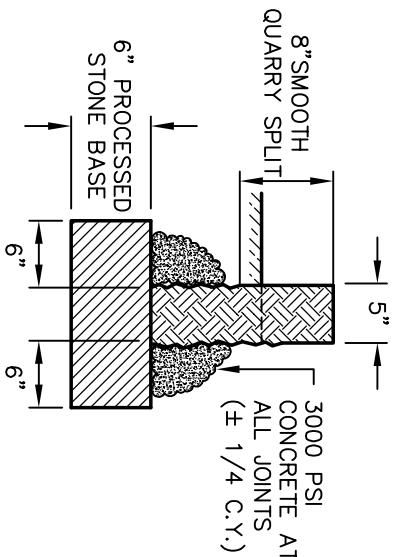


VERTICAL GRANITE CURBING

MAXIMUM ALLOWABLE BREAK BACK IS 9"  
FOR CURB LENGTHS OF 6' OR MORE,  
6" FOR CURB LENGTHS LESS THAN 6'

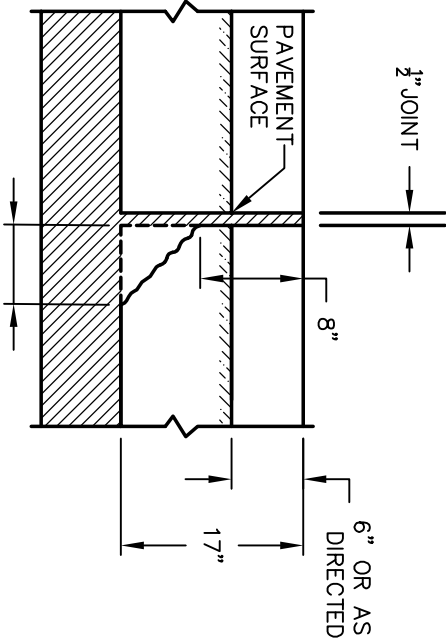


NOTES:

1. ALL BITUMINOUS CURBING IS TO BE SET ON THE BINDER COURSE.
2. ROADWAY SHALL BE SWEEPED CLEAN AND PROPERLY TACK COATED PRIOR TO BITUMINOUS CURB INSTALLATION.

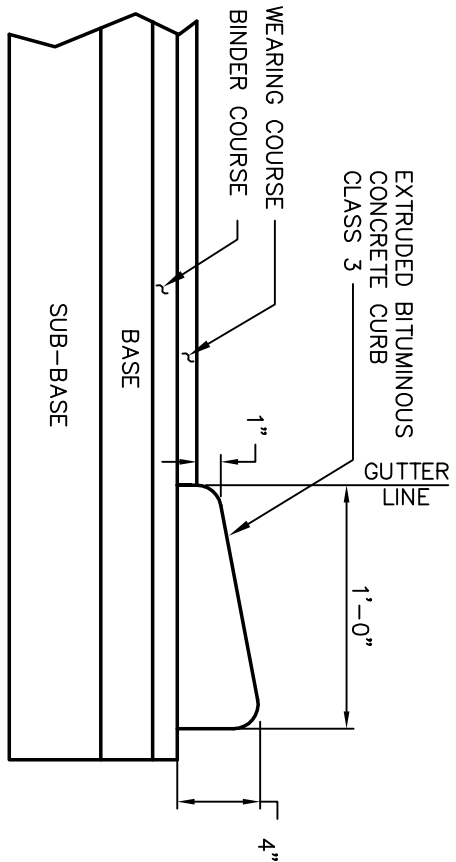

BITUMINOUS CAPE COD CURBING

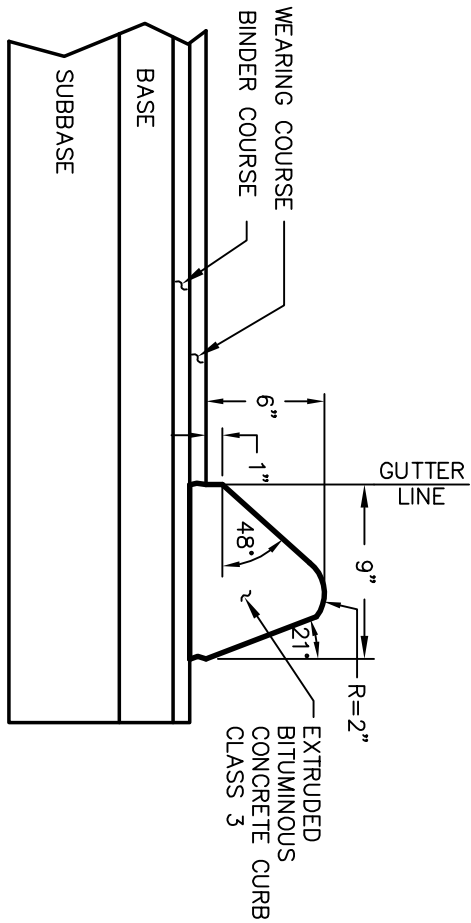

BITUMINOUS CONCRETE LIP CURBING

TOWN OF GLASTONBURY  
DEPARTMENT OF PHYSICAL SERVICES  
ENGINEERING DIVISION

TYPICAL CURBING DETAILS

SCALE : NONE  
DRAWN BY: SR  
CHECKED BY: SMB  
APPROVED BY: DAP  
LAST REVISED:  
4/29/2008

